

# YETI<sup>TM</sup>1250 SOLAR GENERATOR KIT



**NO FUEL, NO FUMES, NO NOISE**

## FITS INTO YOUR LIFE

Use when camping or off grid, in your vehicle as a dual battery alternative, or at home as an emergency back-up

## NO DEVICE TOO BIG OR SMALL

Enough power for household fridges, TV's and power tools

## FLEXIBLE CHARGING

Rapidly refuel the Yeti 1250 from wall, car or sun. Chain additional solar panels for even quicker recharge times


### WHAT IT CHARGES



Plus lots more USB, 12V and AC devices!

POWER. ANYTHING. ANYWHERE.

## HOW IT WORKS

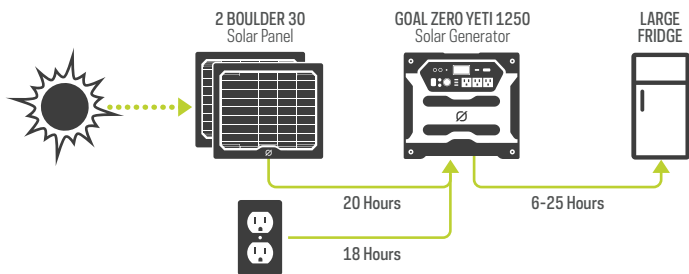

## TECHNICAL SPECIFICATIONS

### YETI 1250 SOLAR GENERATOR

#### BATTERY

Cell type: Sealed lead-acid (AGM)  
Cell capacity: 12V, 100Ah (1250Wh)

#### INPUTS:

Charging ports (8.0mm): 16-20V, up to 10A (120W max) each  
Charging port (Anderson Power Pole): 16-48V, up to 20A (240W)

#### OUTPUTS

2 x AC: 220V, 50Hz pure sine wave, 1200 max total cont, 1500W max short duration. 12V ports: 11-14V, up to 10A (120W), unreg. 2 x 6mm 12V ports: 11-14V, up to 6A (72W) ea, unreg. 12V Power Pole: 12-14V, up to 30A (360W), unreg. 3 x USB ports: 5v, up to 1.5A (7.5W) ea, reg.

#### GENERAL

Chainable: yes  
Weight: 46.7 kg  
Dimensions: 40.5 x 29.3 x 38 cm  
Warranty: 12 months

### BOULDER 30 SOLAR PANEL

#### SOLAR

Capacity: 18V, 30W  
Cell type: monocrystalline

#### OUTPUTS

Solar port: 14-16V, up to 2A (30W), not regulated

#### GENERAL

Chainable: yes  
Weight: 2.9 kg  
Dimensions: 53.2 x 2.5 x 45.8 cm  
Warranty: 12 months

